

Ultraminiature



F4

Dimensions: 12.8x10x5 mm
Electrical values: 250VAC, 5A



FK4

Dimensions: 18x8x5 mm
Electrical values: 250VAC, 5A



F5

Dimensions: 12.8x7x5 mm
Electrical values: 250VAC, 5A



F6

Dimensions: 14.7x9x5.4 mm
Electrical values: 250VAC, 5A



F1NS

Dimensions: 16x6.5x6 mm
Electrical values: 250VAC, 5A

Subminiature



XC

Dimensions: 19.9x9.5x6.4 mm
Electrical values: 250VAC, 10A



X4

Dimensions: 19.9x9.5x6.4 mm
Electrical values: 250VAC, 10A



V4NC

Dimensions: 20x10.3x6.4 mm
Electrical values: 250VAC, 10A



V4N

Dimensions: 20x10.3x6.4 mm
Electrical values: 250VAC, 10A



V4L

Dimensions: 20x11x6.4 mm
Electrical values: 250VAC, 10A

Miniature



XG

Dimensions: 27.8x15.9x10.3 mm
Electrical values: 250VAC, 21A
max




X3

Dimensions: 27.8x15.9x10.3 mm
Electrical values: 250VAC, 21A
max



V3S

Dimensions: 32x24x10 mm
Electrical values: 250VAC, 5A

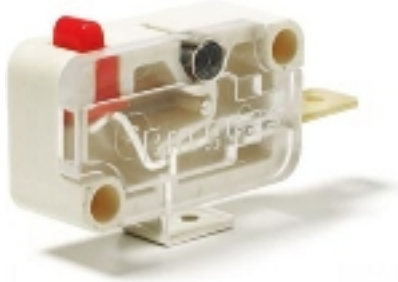

BVM3

Dimensions: 27.8x15.9x10.3 mm
Electrical values: 250VAC, 21A
max

Standard



PN4

Dimensions: 27.8x15.9x10.3 mm
Electrical values: 250VAC, 21A
max



3BR

Dimensions: 53.1x20.6x30.8 mm
Electrical values: 250VAC, 10A
max



K5

Dimensions: 41x19x15.5 mm
Electrical values: 250VAC, 16A

Metal Case



V4N

Dimensions: 42x24.5x15.5 mm
Electrical values: 250VAC, 10A

Force Switches



XP

Dimensions: 30x32x12 mm
Electrical values: 400VAC, 16A



XT

Dimensions: 30x32x12 mm
Electrical values: 400VAC, 16.5A
max

Extended overtravel



V3Q

single pole

Dimensions: 36.5x33.6x17.3 mm

double pole

Dimensions: 36.5x33.6x26.2 mm

Electrical values: fino a 250VAC, 10A



QA4

Dimensions: 30x32x12 mm

Electrical values: 400VAC, 16.5A max